


**Removal**

---

- 1 Remove door liner (72—100).
- 2 Press clips with sealing rail upward off of inside door panel.

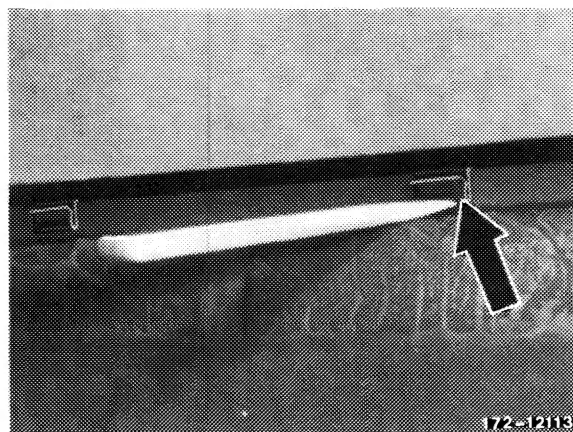

**Installation**

---

- 3 Install in reverse sequence.